




PXYH200GMK

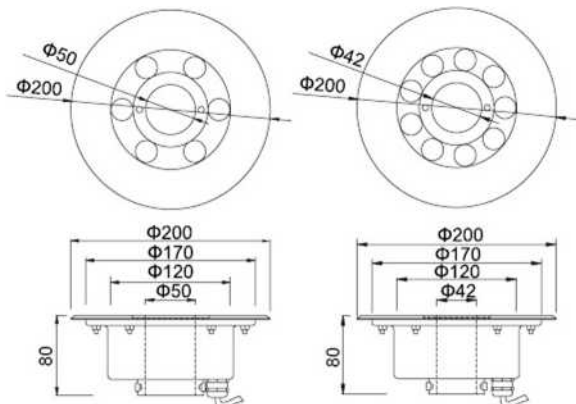

LED

Stainless Steel LED Dry Fountain Light

Beam Angle: 30° as Standard x 10° x 60° x 90° x 120° Optional

Colour: R> Y_x G, B_x W_x WW_x RGB

Lifespan: 50,000hrSx L70@ 25°C

•Control method: Single color. Auto RGB color Changex RGB4wires color change (With remote),x DMX512 control

•Material: 304 stainless Steel,High light transmission tempered glass, Anti-aging silicone sealing ring

Cable: Special underwater waterproof cable 1 meter

•Temperature: Operating temperature-40/+45C Storage temperature-40C/+70

Certification: CEx RoHSx ISO9001x IP68

Waterproof level: IP68



Technical parameters

Electric Parameters

Physical Parameter

Model	Rated Power	Voltage	Dimension	Centre Hole	Recommended Gut Out Size	Reference Weight
PXYH200GMK- 6X1W	6W	AC/DC12Vx AC/DC24V AC220V	D200*80mm	42mm 50mm	180mm	2.5KG
PXYH200GMK- 9X1W	9W	AC/DC12Vx AC/DC24V AC220V				
PXYH200GMK- 12X1W	12W	AC/DC24Vx AC220V				
PXYH200GMK- 6X3W	18W	AC/DC24Vx AC220V				
PXYH200GMK- 9X3W	27W	AC/DC24Vx AC220V				